FITTING A TIMBER FLOOR OVER A CELLECTA SCREEDBOARD®
(INCLUDING PRIMER)

❶ CELLECTA SCREEDBOARD

Please refer to www.cellecta.co.uk for further information regarding this product and usage.

❷ MXS120 PRIMER


Primer is applied by roller over the entire area and has a coverage of approx. 8m^2 per litre. This should be used if there is no uniform porosity.

❸ MXA200 ADHESIVE

This should be trowelled out using the Marldon 3mm or 4mm notched trowel with a coverage of approx. 1KG/sqmetre.

❹ TIMBER FLOOR

Refer to Manufacturer for compatibility.

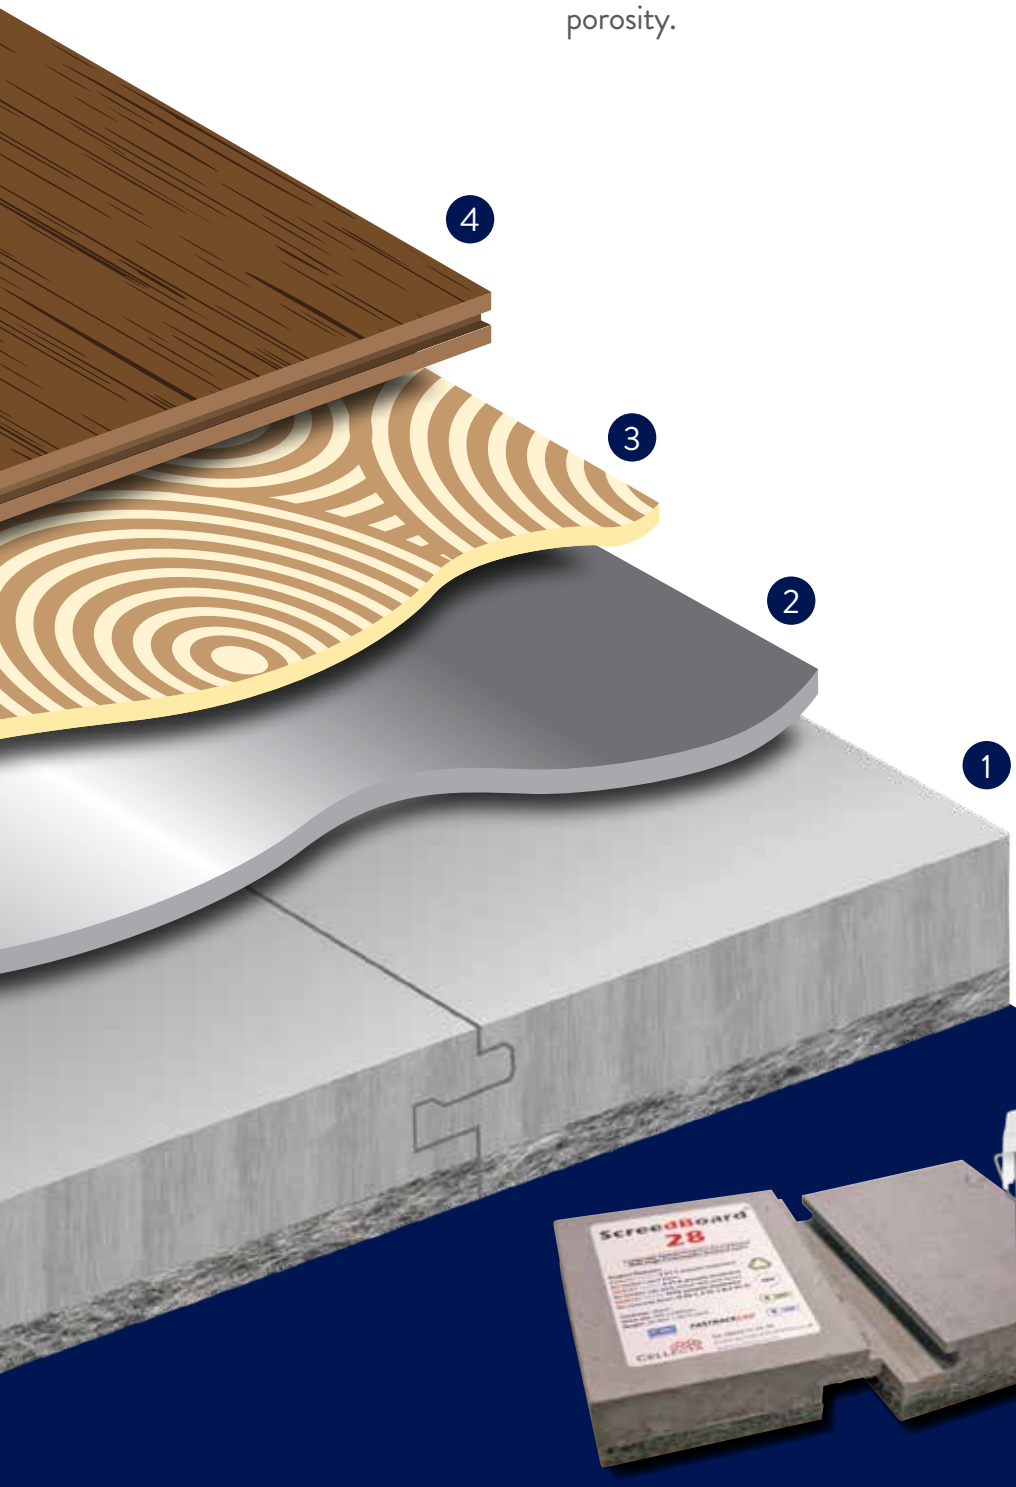

* Please note: It is necessary to achieve Part E, 2003 compliance for such floor constructions - Please ask for more details.

VOC - NIL and Fully BREEAM accredited*

**Adhesive*



01772 696600 | info@marldonuk.com | www.marldonuk.com